



Specifications 规格









Class of Operation 保持特性 :aR

Standard 标准 : UL248-13

**Rating 电气参数 : Amps: 10A-50A
Volts: 750V ac/dc**


**Interrupting Capacity 分断能力: 50kA @750Vac
20kA @750Vdc**

Electrical Characteristics 电气特性


Part Number 物料				Rated current 电流	Pre-arc 弧前	I ² t(A ² Sec)		Safety Approvals 安全认证
1HEV750-xxA	1HEV750-xxAP	1HEV750-xxB	1HEV750-xxC			Clearing at 700V 熔断	Watts Loss at 1.0In 功耗	
1HEV750-10A	1HEV750-10AP	1HEV750-10B	1HEV750-10C	10A	3.6	22	4	
1HEV750-15A	1HEV750-15AP	1HEV750-15B	1HEV750-15C	15A	10	75	5.5	
1HEV750-20A	1HEV750-20AP	1HEV750-20B	1HEV750-20C	20A	26	180	6	
1HEV750-25A	1HEV750-25AP	1HEV750-25B	1HEV750-25C	25A	44	320	7	
1HEV750-30A	1HEV750-30AP	1HEV750-30B	1HEV750-30C	30A	58	450	9	
1HEV750-32A	1HEV750-32AP	1HEV750-32B	1HEV750-32C	32A	68	600	7.6	
1HEV750-40A	1HEV750-40AP	1HEV750-40B	1HEV750-40C	40A	84	750	8	
1HEV750-50A	1HEV750-50AP	1HEV750-50B	1HEV750-50C	50A	200	1800	9	

Dimensions 尺寸 (Unit: mm)


1HEV750-xxA




1HEV750-xxAP

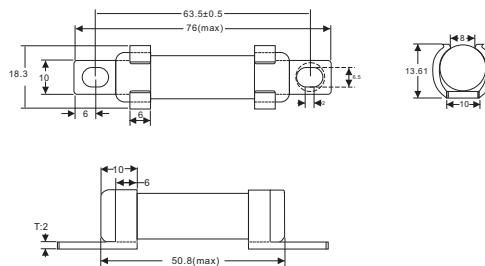


1HEV750-xxB

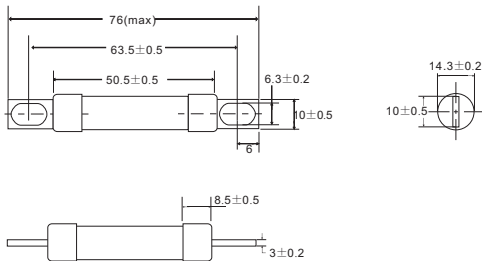

1HEV750-xxC

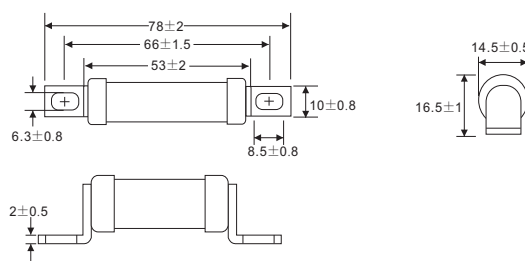

Time-Current Curve 时间-电流曲线

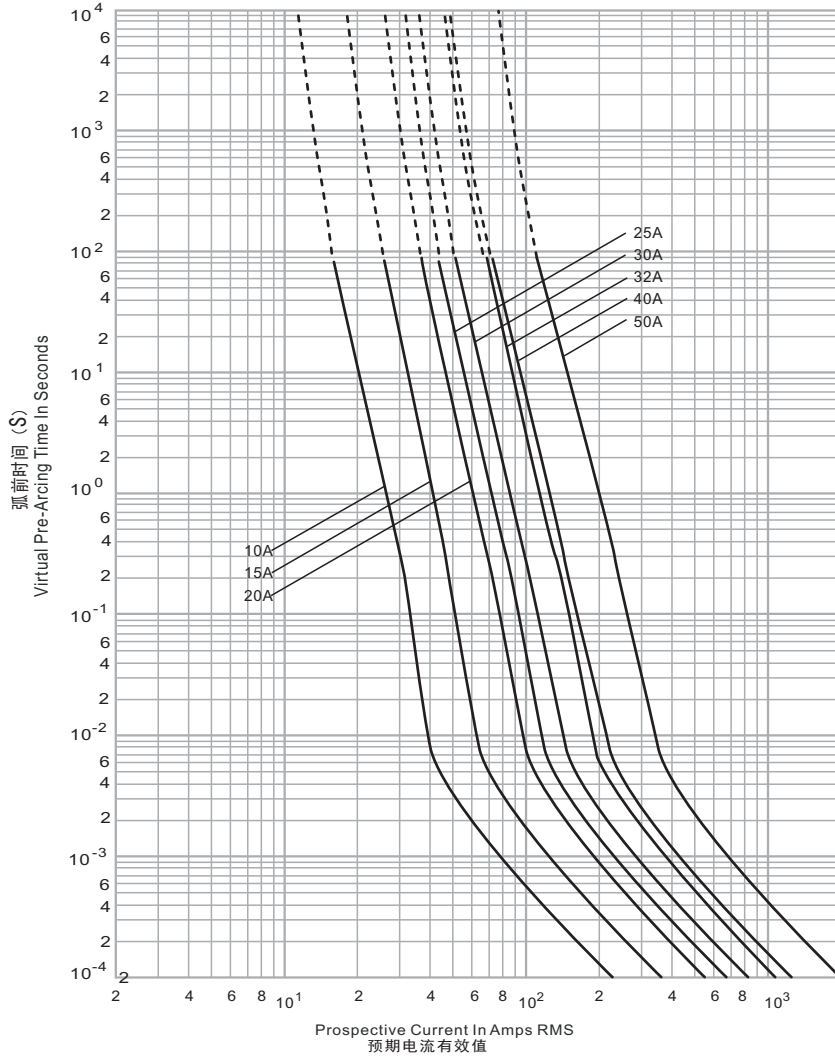

Peak Let-Through Curve 截断电流特性

