

Specifications 规格

Class of Operation 保持特性 :aR

Standard 标准 : UL248-13

Rating 电气参数: Amps: 6-40A

Volts: 500V ac/dc


**Interrupting Capacity 分断能力: 50kA@500Vac
10kA@500Vdc**

Electrical Characteristics 电气特性

Part Number 物料		Rated Current RMS-Ampt 额定电流	Typical Voltage Drop at 70% IR 典型电压降 (mV)	Max. Voltage Drop Spec at 100% IR 最大电压降 (mV)	Typical Cold Resistance 阻值 (mΩ)
OHEV500-xxA	OHEV500-xxAP				
OHEV500-10A	OHEV500-10AP	10	114	300	12.8
OHEV500-15A	OHEV500-15AP	15	96	200	7.9
OHEV500-16A	OHEV500-16AP	16	90	200	7.2
OHEV500-20A	OHEV500-20AP	20	79	200	6.2
OHEV500-25A	OHEV500-25AP	25	73	200	4.6
OHEV500-30A	OHEV500-30AP	30	67	200	2.7
OHEV500-32A	OHEV500-32AP	32	68	200	2.6
OHEV500-40A	OHEV500-40AP	40	69	200	2.0

Dimensions 尺寸 (Unit: mm)

OHEV500-xxA

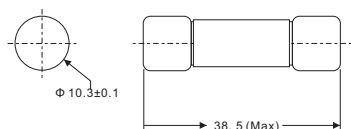

OHEV500-xxAP

