



Specifications 规格















Class of Operation 保持特性 : aR

Standard 标准 : UL248-13

Rating 电气参数 : Amps: 1A-50A
Volts: 700V ac/dc


Interrupting Capacity 分断能力: 50kA @700Vac
20kA @700Vdc

Electrical Characteristics 电气特性


Part Number 物料				Rated current 电流	Pre-arc 弧前	I ² t(A ² Sec)		Safety Approvals 安全认证
1HEV700-xxA	1HEV700-xxAP	1HEV700-xxB	1HEV700-xxC			Clearing at 700V 熔断	Watts Loss at 1.0In 功耗	
1HEV700-1A	1HEV700-1AP	1HEV700-1B	1HEV700-1C	1A	-	-	-	
1HEV700-2A	1HEV700-2AP	1HEV700-2B	1HEV700-2C	2A	-	-	-	
1HEV700-3A	1HEV700-3AP	1HEV700-3B	1HEV700-3C	3A	-	-	-	
1HEV700-4A	1HEV700-4AP	1HEV700-4B	1HEV700-4C	4A	-	-	-	
1HEV700-5A	1HEV700-5AP	1HEV700-5B	1HEV700-5C	5A	1.6	11	1.5	
1HEV700-6A	1HEV700-6AP	1HEV700-6B	1HEV700-6C	6A	-	-	-	
1HEV700-10A	1HEV700-10AP	1HEV700-10B	1HEV700-10C	10A	3.6	22	4	
1HEV700-15A	1HEV700-15AP	1HEV700-15B	1HEV700-15C	15A	10	75	5.5	
1HEV700-20A	1HEV700-20AP	1HEV700-20B	1HEV700-20C	20A	26	180	6	
1HEV700-25A	1HEV700-25AP	1HEV700-25B	1HEV700-25C	25A	44	320	7	
1HEV700-30A	1HEV700-30AP	1HEV700-30B	1HEV700-30C	30A	58	450	9	
1HEV700-32A	1HEV700-32AP	1HEV700-32B	1HEV700-32C	32A	68	600	7.6	
1HEV700-40A	1HEV700-40AP	1HEV700-40B	1HEV700-40C	40A	84	750	8	
1HEV700-50A	1HEV700-50AP	1HEV700-50B	1HEV700-50C	50A	200	1800	9	

Dimensions 尺寸 (Unit: mm)


1HEV700-xxA




1HEV700-xxAP

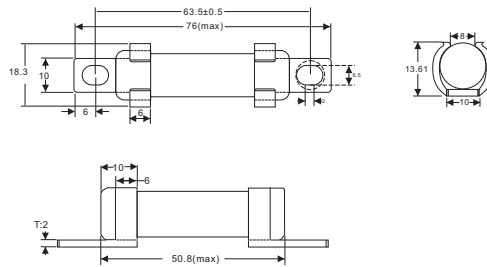


1HEV700-xxB

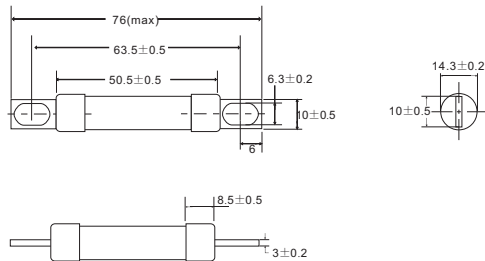

1HEV700-xxC

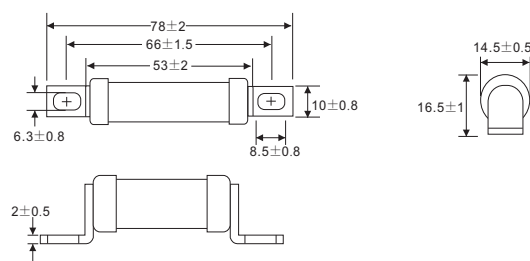

Time-Current Curve 时间-电流曲线

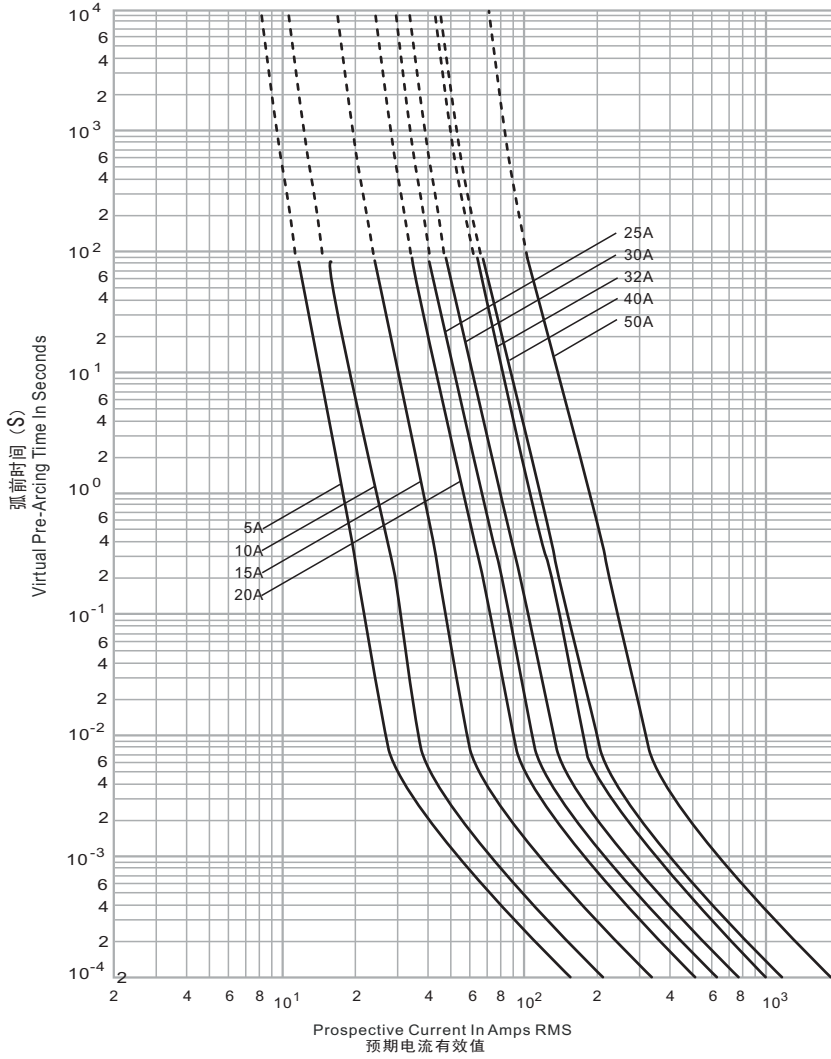

Peak Let-Through Curve 截断电流特性

