E479415 RoHS COMPLIANT

Specifications 规格

Class of Operation 保持特性 :aR

Standard 标准 : UL248-13

Rating 电气参数: Amps: 1A-50A
Volts: 500V ac/dc

Interrupting Capacity 分断能力: 50kA @500Vac
20kA @500Vdc

Elctrical Characteristics电气特性

Part Number 物料				Rated current 电流	I²t(A²Sec)			Safety Approvals 安全认证
1HEV500-xxA	1HEV500-xxAP	1HEV500-xxB	1HEV500-xxC		Pre-arc 弧前	Clearing at 700V 熔断	Watts Loss at 1.0In 功耗	
1HEV500-1A	1HEV500-1AP	1HEV500-1B	1HEV500-1C	1A	-	-	-	●
1HEV500-2A	1HEV500-2AP	1HEV500-2B	1HEV500-2C	2A	-	-	-	●
1HEV500-3A	1HEV500-3AP	1HEV500-3B	1HEV500-3C	3A	-	-	-	●
1HEV500-4A	1HEV500-4AP	1HEV500-4B	1HEV500-4C	4A	-	-	-	●
1HEV500-5A	1HEV500-5AP	1HEV500-5B	1HEV500-5C	5A	1.6	11	1.5	●
1HEV500-6A	1HEV500-6AP	1HEV500-6B	1HEV500-6C	6A	-	-	-	●
1HEV500-10A	1HEV500-10AP	1HEV500-10B	1HEV500-10C	10A	3.6	22	4	●
1HEV500-15A	1HEV500-15AP	1HEV500-15B	1HEV500-15C	15A	10	75	5.5	●
1HEV500-20A	1HEV500-20AP	1HEV500-20B	1HEV500-20C	20A	26	180	6	●
1HEV500-25A	1HEV500-25AP	1HEV500-25B	1HEV500-25C	25A	44	320	7	●
1HEV500-30A	1HEV500-30AP	1HEV500-30B	1HEV500-30C	30A	58	450	9	●
1HEV500-32A	1HEV500-32AP	1HEV500-32B	1HEV500-32C	32A	68	600	7.6	●
1HEV500-40A	1HEV500-40AP	1HEV500-40B	1HEV500-40C	40A	84	750	8	●
1HEV500-50A	1HEV500-50AP	1HEV500-50B	1HEV500-50C	50A	200	1800	9	●

Dimensions 尺寸 (Unit: mm)

1HEV500-xxA



1HEV500-xxAP

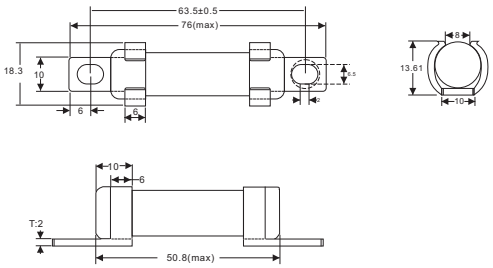

1HEV500-xxB

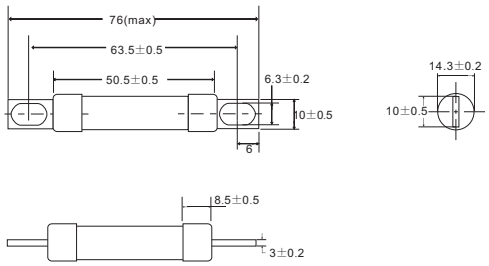

1HEV500-xxC

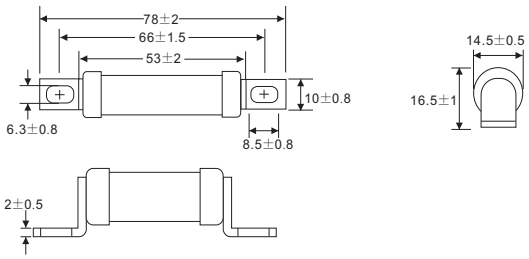

E479415

Time-CurrentCurve时间-电流曲线

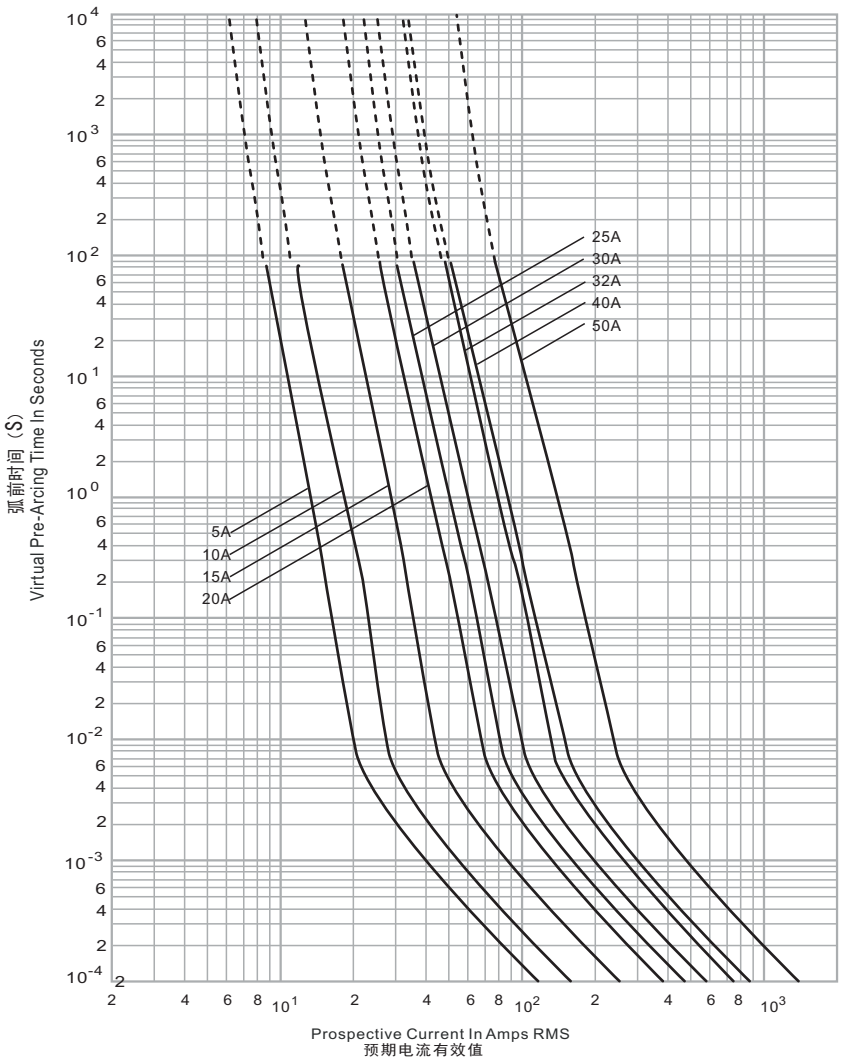
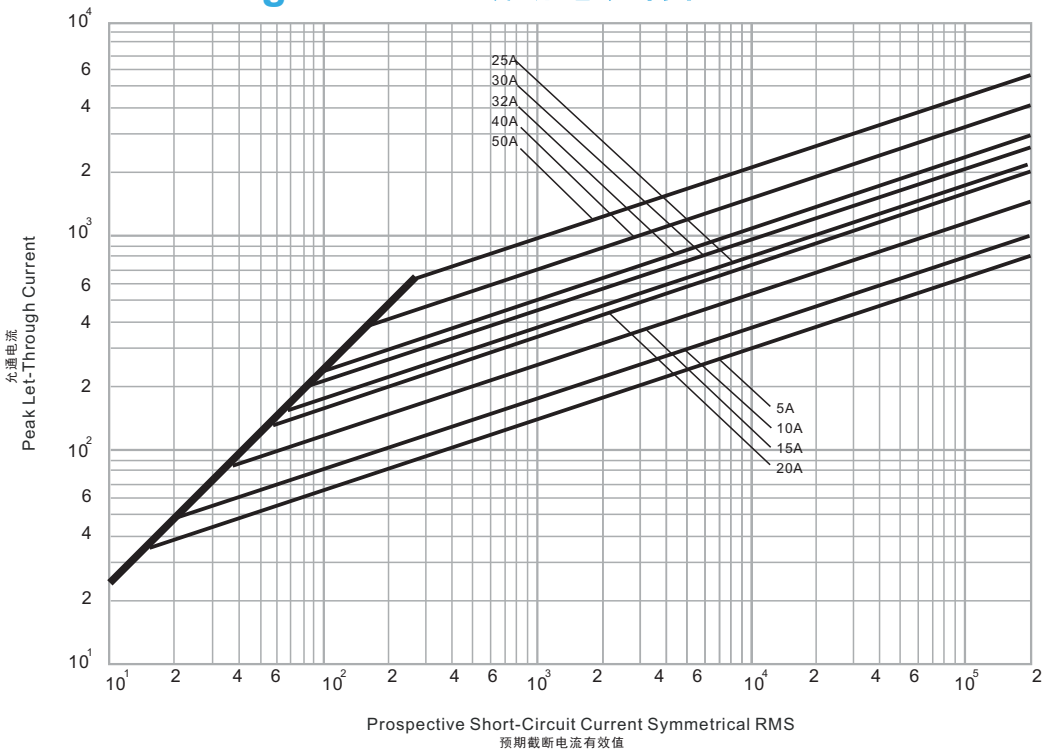
Peak Let-Through Curve 截断电流特性