

Specifications 规格

Class of Operation 保持特性 :aR

Standard 标准 : UL248-13

Rating 电气参数: Amps: 1-10A
Volts: 750Vdc


Interrupting Capacity 分断能力: 10kA@750Vdc

Electrical Characteristics 电气特性

Part Number 物料		Rated Voltage 额定电压 dc	Rated Current 额定电流 (A)	Breaking Capacity 分断能力 dc	Energy Integrals I ² t (A ² S)		Power Loss 功耗	
OHEV750-xxA	OHEV750-xxAP				Pre-Arcing 弧前	Total at 750V 熔断	0.8I _n	1.0I _n
OHEV750-1A	OHEV750-1AP	750V	1	10kA, Time Constant<1ms	0.15	0.4	0.8	1.5
OHEV750-2A	OHEV750-2AP		2		1.3	3.4	0.7	1.1
OHEV750-3A	OHEV750-3AP		3		4	12	0.8	1.3
OHEV750-4A	OHEV750-4AP		4		10	28	1.1	1.4
OHEV750-5A	OHEV750-5AP		5		19	50	1.1	1.4
OHEV750-6A	OHEV750-6AP		6		32	93	1.2	1.8
OHEV750-8A	OHEV750-8AP		8		3.2	33	1.2	2.2
OHEV750-10A	OHEV750-10AP		10		30	70	1.3	2.3

Dimensions 尺寸 (Unit: mm)

OHEV750-xxA

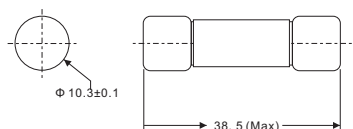

OHEV750-xxAP

